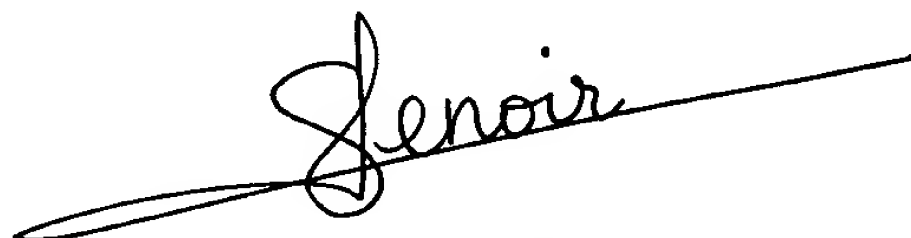



DECLARATION

I, Sophie LENOIR of BREVALEX – 3 rue du Docteur Lancereaux – 75008 PARIS, do hereby declare that I am conversant with the English and French languages and that the following is a true and correct translation into English of the French patent application n° 99 01438 filed on February 8, 1999 for "*Procédé de fabrication de matrices de ligands adressés sur un support*".

Signed this October 13, 2003

A handwritten signature in cursive script, appearing to read 'S. Lenoir', written over a horizontal line.

S. LENOIR

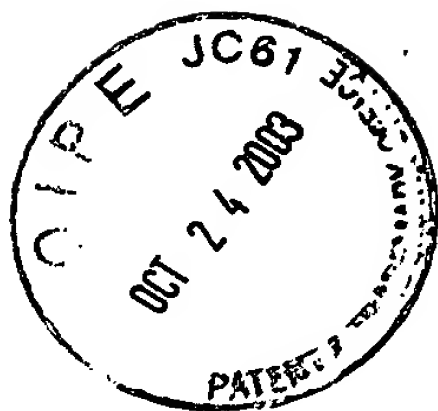

METHOD FOR PRODUCING MATRICES OF ADDRESSED LIGANDS
ON A CARRIER

Technical field

5 The subject of the present invention is a method for producing matrices of addressed ligands on a carrier.

10 The ligands may be natural or synthetic products having biological activity or an affinity for biological or other molecules, for example peptides, oligonucleotides, receptors or other molecules of biological interest. Matrices of this type may find numerous applications, in particular for the detection and identification of constituents in biological
15 samples and for screening molecule libraries. Such matrices may in particular be matrices of oligonucleotide probes.

Prior art

20 In the past few years several methods have been developed for producing matrices of this type. Three methodologies are known in which addressing is made either by photochemical route, or by mechanical route, or by electrochemical route.

25 In the document by Fodor S. et al, Science, 1991, 251, pages 767-773 [1] a method is described for making a matrix of oligonucleotides by photochemical addressing. According to this method, a carrier is used functionalised by functional groups
30 protected by photolabile protector groups; these protector groups are then removed by radiation through a mask on the sites which are to be coupled to the

molecules of biological interest, then these molecules are coupled to the de-protected functional groups.

This mode of photochemical addressing has the disadvantage of requiring a large number of different
5 masks to carry out all the coupling operations.

The documents: Khrapko K. R. et al, DNA Sequence -
I. DNA Sequencing and Mapping, 1991, volume 1, pages 375
to 388 [2] and GB-A-2 319 838 [3] describe a method for
producing matrices by mechanical addressing. In
10 document [2] a carrier is used which is coated with a
polyacrylamide gel that is activated by substituting
certain amide groups by hydrazide groups. The
oligonucleotides activated in aldehyde form are then
fixed to the hydrazide groups by micropipetting the
15 oligonucleotide solutions onto the sites to which they
are to be coupled.

In document [3] a carrier is used which is
functionalised by reagent groups and coupled to
identical biological molecules. The carrier is then cut
20 into individual plaques each one corresponding to the
coupling of a molecule and then several plaques
carrying different molecules at desired sites are
subsequently assembled on a plate.

The use of these mechanical addressing techniques
25 has the disadvantage of having to bring the molecule
to be fixed directly to the site to be addressed.
Therefore the size of the site cannot be smaller than
the size of the drop of dispensed reagent. Also, the
process requires two phases which are respectively a
30 dispensing phase and then a covalent attachment phase.
Also the carrier has to be modified such that a
covalent bond may be formed between the carrier and the
molecule to be fixed.

The documents: Livache T. et al, Nucleic Acids Res., 1994, 22, 15, pages 2915-2921 [4] and WO-A-94/22889 [5] describe electrochemical addressing techniques to produce matrices of biological products.

5 In this case a carrier is used which comprises several electrodes and these electrodes are used to fix the biological molecules by electrochemical route. For this purpose, the carrier fitted with its electrodes is immersed in a solution containing the molecule to be
10 fixed, and by activation of the desired electrodes they are coated with the molecule by electrochemical route. On this account, the deposits of molecules can only be made in successive manner. Moreover, it is necessary to use a carrier carrying electrodes that can be
15 individually addressed, therefore complex systems that are possibly multiplexed.

The subject of the present invention is precisely a method for producing matrices of biological products on a carrier, which remedies the disadvantages of the
20 above-mentioned methods and with which it is possible in addition to conduct the addressing and fixing of the biological molecule in a single step, without requiring prior functionalisation of the carrier.

25 Description of the invention

For this purpose, the invention puts forward a method for producing a matrix containing at least one ligand fixed by electrochemical route to a conductive carrier or to conductive zones of a carrier, in which
30 at least one element is used able to dispense the ligand or ligands as electrode to achieve electrically assisted fixing of the ligand or ligands on the

conductive carrier or on the conductive zones of the carrier.

According to the invention, an element is therefore used as electrode which is able to dispense
5 the ligand or ligands. This element may be made up of a reservoir containing the ligand and comprising a conductive part, or it may simply be formed of an electrode in the form of a wire or needle which, after immersion in a container containing the ligand to be
10 fixed, is charged with this ligand by capillarity.

By using an electrode formed of said element according to the invention, it is possible to place the ligand in contact with the conductive carrier or the conductive zones of the carrier, then to fix it
15 directly to the conductive carrier (or the conductive zone) by electrochemical activation, for example by setting up a potential difference or by generating a current between the conductive carrier (or the conductive zone) and the element acting as electrode.

20 Therefore the dispensing and fixing of the ligand to the carrier is conducted in a single step.

According to a first embodiment of the invention, said element comprises a reservoir filled with the ligand and comprising an insulating dispenser nozzle
25 and at least one electrode arranged in said reservoir, said nozzle being in direct contact with the conductive carrier or at least one conductive zone of the carrier, during the fixing operation.

The nozzle may in particular be a capillary tube
30 which is directly placed on the conductive surface.

According to a second embodiment of the invention, said element comprises a reservoir filled with ligand, and comprising a conductive dispenser nozzle, the

contact between the conductive nozzle and the conductive carrier or at least one conductive zone of the carrier being assured via a drop of ligand leaving the nozzle during the fixing operation.

5 In this case, the conductive nozzle is not in contact with the conductive carrier or the conductive zone. As previously, the conductive nozzle may be formed of a capillary tube.

According to a third embodiment of the invention,
10 said element is formed of an electrode in wire or needle form, charged externally with ligand, the contact between the electrode and the conductive carrier or a conductive zone of the carrier being assured during the fixing operation by a drop of ligand
15 withheld by the electrode.

In the different embodiments described above, the reservoir generally contains a solution of ligand to be fixed and reagent(s) that may optionally be needed to ensure fixing of the ligand by electrochemical route.

20 The electrochemical fixing of the ligand may be made in particular by coupling it to an electropolymerisable monomer. In this case, the solution contains the ligand coupled to an electropolymerisable monomer, the electropolymerisable
25 monomer and optionally a doping agent.

The electropolymerisable monomer may in particular be one of those described by Emr S. and Yacynych A., Electroanalysis, 1995, 7, pp. 913-923 [7]. They may belong to two categories, those leading to conductive
30 polymers such as pyrrole, aniline, thiophene.. and their derivatives, and those leading to insulating polymers such as derivatives of phenol or benzene.

In this case, fixing of the ligand is achieved by electrocopolymerisation of the monomer and of the ligand coupled to the monomer.

The ligand may for example be an oligonucleotide,
5 a nucleotide, an amino acid or a peptide.

Said method of electrochemical fixing is described in document [5] for ligands which are an oligonucleotide or a nucleotide.

In this latter case, after conducting fixation,
10 the chain of the fixed oligonucleotide or nucleotide can be lengthened through application of conventional synthesis methods for oligonucleotides by successive coupling of the desired nucleotides, but by conducting electrochemical de-protection of the last nucleotide
15 fixed.

In respect of peptides, it is possible to use the same technique to lengthen the chain of the peptide by coupling the desired amino acids.

The use of the electrodes described above to
20 achieve the depositing and fixing of a ligand by electrochemical route has the following advantages:

- The depositing and fixing procedure is carried out in a single step and it is very rapid.

- This technique is easy to implement since it
25 simply uses a mechanical depositing technique, for example transfer using a micropipette, but it is coupled to the space resolution possibilities of electrochemistry.

- With this technique it is possible to carry out
30 several deposits in parallel mode.

- Also, this method does not require the use of modified carriers or which carry individually addressable electrodes.

For carriers in conductive material, these may be made entirely in an electrically conductive material or they may be made of an insulating material coated with a layer of conductive material.

5 The conductive materials which can be used may be of different types, they may for example be metals such as gold, silver and platinum, or conductive oxides such as indium and tin oxide (ITO), carbon or conductive organic polymers.

10 If the carrier comprises conductive zones, these may be made in the conductive materials cited above and arranged on an insulating carrier.

 The insulating carrier may for example be in glass, silicon or plastic material. It is also possible
15 to use a carrier in a conductive material whose conductive zones are delimited by depositing an insulating material on the surface of the conductive material.

 According to the invention, the conductive zones
20 may be electrically interconnected or electrically addressable either individually or in groups so that they can be activated separately.

 The method of the invention may be implemented such as to fix identical or different ligands on
25 different conductive sites of the carrier.

 In this case, simultaneous or successive fixing of identical or different ligands may be made using several elements respectively dispensing identical or different ligands. In this case, at least two of the
30 elements may be grouped together to form a print head.

 According to one variant of the invention, successive fixing is made of at least two different ligands to different sites of the carrier using a

single element but by changing the ligand dispensed by this element at least once.

In all the embodiments described above, the main advantage lies in the ligand dispensing-coupling process which enables the production of carriers carrying addressed molecules in extremely fast manner.

A further subject of the invention is a device for producing a matrix of ligands on a conductive carrier or on conductive zones of a carrier, comprising:

10 - at least one ligand dispensing means provided with a conductive part,

 - means for connecting firstly the conductive carrier or the conductive zones of the carrier, and secondly the conductive part of the dispensing means to
15 an electric generator, and

 - means for positioning and/or moving the carrier and/or the dispensing means, relative to one another, such as to make several deposits of ligands on the carrier at different sites.

20 According to the invention, the dispensing means may comprise a reservoir containing the ligand and at least one electrode arranged in said reservoir and forming the conductive part of said means.

 According to one particular arrangement, the
25 device comprises several ligand dispensing means assembled in the form of a print head.

 According to one variant of embodiment, said dispensing means is constituted by an electrode in the form of a wire or needle able to be charged externally
30 with the ligand.

Other characteristics and advantages of the invention will become clearer on reading the following description which is evidently given for illustrative

purposes and is non-restrictive, with reference to the appended drawings.

Short description of the drawings

5 Figure 1 is a diagram of an element comprising a ligand dispensing reservoir and at least one electrode to fix the ligand to a conductive carrier.

10 Figure 2 shows an element similar to the one in figure 1 to achieve fixing of a ligand to a conductive carrier provided with conductive zones that are electrically interconnected.

15 Figure 3, on an enlarged scale, shows the nozzle of the dispensing reservoir in figure 1, to carry out fixing of the ligand on a carrier comprising multiplexed conductive zones.

 Figures 4A and 4B illustrate the necessary steps to achieve fixing of a ligand to a conductive carrier using an electrode in wire form.

20 Figure 5 shows a dispensing element, fitted with a fluid inlet and outlet to ensure its filling and draining, between two different ligand fixing operations.

25 Figure 6 is a diagram of a print head comprising several reservoirs for dispensing identical or different ligands

Detailed disclosure of the embodiments

30 Figure 1 shows the first embodiment of the invention in which as electrode an element is used comprising a reservoir 1 filled with the ligand to be fixed and comprising a dispensing nozzle 1a. Inside reservoir 1 are arranged a counter-electrode 3 made in

platinum or gold for example, and a control electrode 5.

The reservoir may contain a sufficient volume of reagent to carry out a certain number of deposits, 5 which may for example reach one thousand.

In this first embodiment shown in figure 1, a conductive carrier 7 is used which may comprise a glass substrate coated with a gold layer.

This figure shows the deposits 9 made with said 10 reservoir by moving the carrier along directions x and y for example between two deposits. If the nozzle 1a of the reservoir, in the form of a capillary tube for example, is made in an insulating material it can be placed on the conductive carrier 7 and, by setting up a 15 difference in potential or current between conductive surface 7 and the counter-electrode 3, it is possible to obtain deposits 9 which are fixed to the conductive surface 7 by electric impulse. In this case, the size of the deposits 9 is determined by the size of the 20 reservoir/carrier interface located in the lines of the electric field between the electrode and the conductive surface. This interface must be as small as possible to reduce the size of the deposit obtained.

The reservoir in figure 1 may also comprise a 25 nozzle 1a in conductive material. In this case, fixing of the ligand present in the reservoir is made by contacting the conductive surface 7 with the electrode formed by nozzle 1a by means of a drop leaving nozzle 1a. In this case the size of the deposits is 30 also adjusted by the interface between the liquid and the conductive surface located in the lines of the electrical field.

The resolution of the deposits 9 may be improved by using a carrier as shown in figure 2 formed of interconnected conductive zones. In figure 2 the same references have been used as in figure 1 to designate the reservoir 1 fitted with its nozzle 1A, a control electrode 5 and a counter-electrode 3. In this case the carrier is formed of an insulating carrier provided with conductive zones 13 insulated from each other but electrically interconnected. These conductive zones may be made in gold on a glass or silicon substrate for example. In this case, deposits 9 are obtained by dispensing the ligand above the conductive zones, but only the conductive zones in contact with the ligand can be coated with the latter. Therefore the size of the deposits is adjusted by the size of the conductive zones 13.

In this case, the conductive carrier used in fact only comprises a single electrode; this immensely simplifies its production and the costs involved may be very low since simple sheets of plastic material coated with conductive material may be used.

The use of a network of conductive zones makes it possible to reduce the size of the deposits 9, but not to increase the density of the matrix. This density is directly dependent upon the size of the interface between the capillary nozzle 1a and the carrier and it is limited by the size of the nozzle.

It is nonetheless possible to increase the density of the matrix by using a carrier comprising conductive zones forming multiplexed electrodes, as shown in figure 3.

Figure 3 illustrates the nozzle 1a of the reservoir 1 in figures 1 and 2 on an enlarged scale and

part of an insulating conductive carrier 11 provided with conductive zones 13 which are separately connected to means for applying a potential or current so that they can be activated separately. In this case, the size of the deposits is determined by the size of the activated conductive zones 12 as shown in the case in figure 3. The other conductive zones which are in contact with the ligand cannot lead to fixing of the ligand since they are not electroactivated. In this manner, it possible to simultaneously achieve high space resolution and strong matrix density.

In figures 4A and 4B another embodiment of the invention is shown in which the element able to dispense the ligand is formed by an electrode 15 in wire form.

In this case, a conductive carrier 7 can be used as shown in figure 4A. To make a ligand deposit, the electrode 15 is firstly immersed in a container 17 containing the ligand to be fixed and the electrode withholds a drop 19 of this ligand. The electrode containing the drop 19 of ligand is then brought above conductive carrier 7 as shown in figure 4B making electric contact by means of drop 19. By applying an electric impulse between electrode 15 and the conductive carrier 7 the formation of deposits of ligand is obtained.

After this operation, the electrode 15 is rinsed in a rinsing tank 21 so that it can be used again to make another deposit 9 either with the same ligand or with another ligand.

When this type of electrode is used, the resolution of the deposits may be lower but in this

case the possible rinsing of electrode 15 is a determinant advantage.

The method of the invention is of great interest since it provides the possibility firstly of using a
5 very small volume of reaction medium and therefore of economising the molecules of biological interest to be coupled. Also, the size of the deposits made on the carrier may be adjusted whereas in mechanical
10 addressing methods involving conventional chemical activation methods the size of the deposits could not be less than 50, even 100 μm .

According to the invention, the size of the deposits can be very easily reduced not by reducing the size of the drop which is difficult in practice, but by
15 reducing the surface of the zone that can be electroactivated. The resolution of the deposits is optimised through the fact that only the electrode/carrier interface located in the lines of the electric field can be activated; that is to say that if
20 a drop spills outside this zone, its content will not be fixed to the conductive surface.

Therefore if the diameter of the interface between the nozzle 1a and the conductive carrier is 200 μm , and if a conductive zone is used whose side measurement is
25 only 10 μm , only this conductive zone may be coated with the molecules of biological interest.

According to the invention, it is possible to make deposits 9 of different ligands on a carrier. This may be achieved by successively fixing at least two
30 different ligands to different sites of the carrier using a single element and by changing the ligand dispensed by said element. In this case, the deposits may be made successively, either by changing the

content of reservoir 1 of the elements shown in figures 1 and 2, or by using the electrode in figure 4 which is immersed in different reagents. It is also possible to use a fixed reservoir provided with ligand adding and evacuation means, that is to say comprising a fluid inlet and outlet system for the ligand so as to change the content of the reservoir without having to move it.

Figure 5 illustrates said embodiment of reservoir 1 provided with a fluid inlet 1b and an outlet 1c.

Evidently, it is also possible in order to make deposits 9 of identical or different ligands, to use several elements such as those shown in figures 1 and 4. These elements may optionally be assembled to form a print head as shown in figure 6.

In figure 6 it can be seen that the print head contains a first reservoir R1 filled with a ligand P1, a second reservoir R2 filled with a ligand P2 and a third reservoir R3 filled with a ligand P3. With a multiple head of this type it is possible to make three simultaneous deposits 9 of ligands P1, P2 and P3 respectively on the conductive surface 7.

It is specified that the deposits may be made in an inert atmosphere or in an electrochemically neutral liquid medium which, if possible, is non-miscible with the reaction medium contained in the reservoir.

After the depositing phase, the carrier may be rinsed and used in conventional manner.

The following examples illustrate the production of matrices of oligonucleotides or peptides using oligonucleotides or peptides carrying a pyrrole group which are fixed to a conductive carrier by

copolymerising them with pyrrole by electrochemical route using the method described in document [5]: WO-A-94/22889.

5 Example 1

1-Production of carriers carrying oligonucleotides

The conductive carriers used are glass plates coated with a layer of chromium (for adherence) and a
10 continuous layer of gold of 0.5 μm . This layer is connected to the "working electrode" outlet of an EGG 283 potentiostat.

Two different oligonucleotides carrying a pyrrole group at 5' are copolymerised on these carriers. Their
15 sequences are as follows:

pyrM5 : 5' pyr (T)₁₀ GGAGCTGCTGGCGT 3'
pyrCP : 5' pyr (T)₁₀ GCCTTGACGATACAGC 3'

They were synthesized using the method described by Livache et al in [5].

20 To fix these oligonucleotides to the carrier, a reaction medium is used containing 0.1M LiClO₄, 20 mM pyrrole and 1 μM oligonucleotide carrying a pyrrole group at 5'.

This solution is added to a reservoir in
25 polypropylene of cone shape which contains a platinum counter-electrode (CE) connected to the potentiostat. This reservoir is easily filled using a micropipette whose volume may vary from 50 to 1000 μl reaction medium. The tip of this cone has a diameter of
30 approximately 0.8 mm. Finer or larger cones can be used for other volumes of reagent.

The tip of the cone is placed in contact with the conductive surface and the copolymer is made by cyclic

voltametry (from -0.35 to +0.85V/CE at the rate of 100mV/s). The charge recorded is used to determine the thickness of the polymer formed. After the formation of this first deposit, the cone is emptied,
 5 rinsed then filled with a new reaction medium containing another oligonucleotide. The conductive plate is moved (table x/y/z) and the same copolymerisation operation is conducted on another area of the conductive surface enabling the production of a
 10 deposit carrying another oligonucleotide sequence.

In this manner two matrices are prepared solely comprising pyrM5 oligonucleotides and two matrices solely comprising pyrCP oligonucleotides.

It is checked that the matrices of
 15 oligonucleotides so obtained have the desired properties for detecting complementary oligonucleotides by hybridisation.

2-Hybridisation of oligonucleotides and detection.

20 The complementary oligonucleotides tested are the following:

- biotinylated complementary M5: bio_{comp}M5;
- biotinylated complementary CP: bio_{comp}CP.

The hybridisation of the complementary
 25 oligonucleotides is conducted in PBS buffer (Sigma containing 0.5M NaCl, 100 µg/ml salmon sperm DNA (Sigma), 10 mM EDTA and 10 nM of complementary biotinylated oligonucleotide. Hybridisation is conducted at 45°C in a volume of 20 µl for 15 min.
 30 Quick rinsing in PBS/NaCl is made. Detection of the hybrids is then carried out after incubation in PBS/NaCl solution containing 0.1 mg/ml R phycoerythrine (Molecular Probe). Fluorescence is detected using a

cold camera (Hamamatsu) mounted on an epifluorescence microscope. The results are expressed as shades of grey.

A spot of polypyrrole approximately 0.8 mm in diameter is observed whose fluorescent intensity is reported below:

- oligonucleotide on pyrM5 carrier hybridised with bio_{comp}M5: 110
- oligonucleotide on pyrM5 carrier hybridised with bio_{comp}CP: 5
- oligonucleotide on pyrCP carrier hybridised with bio_{comp}M5: 7
- 10 -oligonucleotide on pyrCP carrier hybridised with bio_{comp}CP: 84

Good hybridisation specificity is observed with a high signal/noise ratio.

Example 2

15 The same operating method is followed as in example 1 to prepare matrices of pyrM5 and pyrCP oligonucleotides but using as conductive carrier a carrier in plastic material coated with indium and tin oxide (ITO).

20 The results obtained with these matrices for the detection of biotinylated complementary oligonucleotides are the following:

- oligonucleotide on pyrM5 carrier hybridised with bio_{comp}M5: 95
- oligonucleotide on pyrM5 carrier hybridised with bio_{comp}CP: 5
- 25 -oligonucleotide on pyrCP carrier hybridised with bio_{comp}M5: 7
- oligonucleotide on pyrCP carrier hybridised with bio_{comp}CP: 105

Example 3

30 In this example, the same operating method as in example 1 is followed to prepare a matrix of pyrM5 oligonucleotides on a carrier in gold supported by

glass but as counter-electrode a platinum wire is used charged with reaction medium instead of the reservoir fitted on the inside with a platinum electrode.

As shown in figure 4A, the platinum wire 15 is charged with reaction medium by immersion in a reservoir 17 containing this medium. The wire carrying the drop 19 is then brought to the carrier until contact is made with the drop. The electrochemical impulse is then made. The wire is lifted away and rinsed in water. Other deposits are made in the same manner. In this way deposits of approximately 1 mm in diameter are obtained and intense fluorescence is visible when the matrix is used to conduct hybridisation of the complementary oligonucleotide. The results obtained are the following:

-oligonucleotide on pyrM5 carrier hybridised with bio_{comp}M5: 400

-oligonucleotide on pyrCP carrier hybridised with bio_{comp}CP: 10

Example 4

In the same manner, peptides may be deposited. Pyrrole-peptides are synthesised using the procedure described by T. Livache et al, Biosensor and Bioelectronics 13, (1998) 629-634 [6]. They are deposited following the usual procedure (). The two peptides ACTH (18-39) and ACTH(11-24) are then detected by the biotinylated antibodies Mab (34-39) and Mab (18-24) respectively.

Fluorescence results after incubation with streptavidin phycoerythrine are the following:

30

Peptide ACTH 18-39 with Mab 34-39	640
Peptide ACTH 18-39 with Mab 18-24	510
Peptide ACTH 11-24 with Mab 34-39	10
Peptide ACTH 11-24 with Mab 18-24	470

Cited references

- [1] Fodor S. et al, Science, 1991, 251, pp. 767-773.
- 5 [2] Khrapko K.R. et al, DNA Sequence -I.DNA Sequencing and Mapping, 1991, vol. 1, pp. 375-388.
- [3] GB-A-2 319 838.
- 10 [4] Livache T. et al, Nucleic Acids Res., 1994, 22, 15, pages 2915-2921
- [5] WO-A-94/22889.
- 15 [6] T. Livache et al, Biosensors and Bioelectronics 13, (1998), pages 629-634.
- [7] Emr S. and Yacynych A, Electroanalysis, 1995, 7, pp. 913-323.

CLAIMS

1. Method for producing a matrix comprising at least one ligand fixed by electrochemical route to a
5 conductive carrier or to conductive zones of a carrier, in which at least one element is used able to dispense the ligand(s) as electrode to carry out electrically assisted fixing of the ligand(s) on the conductive carrier or on the conductive zones of the carrier.

10

2. Method according to claim 1, in which said element is made up of a reservoir containing the ligand and having a conductive part.

15

3. Method according to claim 2, in which the reservoir is provided with ligand insertion and evacuation means.

20

4. Method according to claim 1, in which said element is made up of an electrode in wire or needle form, charged externally with ligand, the contact between the electrode and the conductive carrier or a conductive zone of the carrier being assured during the fixing operation by means of a drop of ligand withheld
25 by the electrode.

30

5. Method according to any of claims 1 to 4, in which identical or different ligands are fixed simultaneously or successively on different conductive sites of the carrier by using several elements respectively dispensing identical or different ligands.

6. Method according to claim 5, in which at least two of the elements are grouped together to form a print head.

5 7. Method according to any of claims 1 to 4, in which at least two different ligands are successively fixed to different sites of the carrier using a single element and by changing at least once the ligand dispensed by this element.

10

8. Method according to any of claims 1 to 4, in which the conductive zones are formed of zones of conductive material arranged on an insulating carrier.

15

9. Method according to claim 8, in which the zones of conductive material are electrically interconnected.

10. Method according to claim 8, in which the zones of conductive material are electrically
20 addressable either separately or in groups so that they can be activated separately.

11. Method according to any of claims 8 to 10, in which the conductive material is chosen from the group
25 made up of gold, silver, platinum, indium and tin oxide (ITO), carbon and conductive organic polymers.

12. Method according to any of claims 1 to 11, in which the ligand is a ligand coupled to an
30 electropolymerisable monomer.

13. Method according to claim 12, in which each element dispenses a solution of ligand containing the

ligand coupled to an electropolymerisable monomer, the electropolymerisable monomer and optionally a doping agent.

5 14. Method according to 12, in which the electropolymerisable monomer is pyrrole.

10 15. Method according to claim 13 or 14, in which fixing of the ligand is obtained by electro-copolymerisation of the monomer and of the ligand coupled to the monomer.

15 16. Method according to any of claims 12 to 15, in which the ligand is a nucleotide, an oligonucleotide, an amino acid or a peptide.

17. Device for producing a matrix of ligands on a conductive carrier or on conductive zones of a carrier, comprising:

- 20 - at least one ligand dispensing means (1, 15) provided with a conductive part (3, 15),
- means for connecting firstly the conductive carrier (7) or conductive zones (13) of the carrier, and secondly the conductive part (13, 15) of the
- 25 dispensing means to an electric generator, and
- means for positioning and/or moving the carrier and/or the dispenser means relative to one another such as to carry out several ligand deposits on the carrier at different sites.

30

18. Device according to claim 17, in which said dispensing means comprises a reservoir (1) containing the ligand and at least one electrode (3, 5) arranged

in said reservoir and forming the conductive part of said means.

19. Device according to claim 18, which comprises
5 several ligand dispensing means assembled in the form of a print head.

20. Device according to claim 17, in which said
dispensing means is constituted by an electrode (15) in
10 the form of a wire or needle able to be charged externally with the ligand.

METHOD FOR PRODUCING MATRICES OF ADDRESSED LIGANDS
ON A CARRIER

ABSTRACT OF THE DISCLOSURE

The invention concerns a method for fabricating matrices of addressed ligands on a carrier.

According to this method, an element is used such as a reservoir (1) filled with ligand and containing an electrode (3) to deposit and electrochemically fix the ligand to the conductive carrier (7).

The ligand may be an oligonucleotide or a peptide, and fixing may be obtained by electrocopolymerisation of this oligonucleotide or peptide carrying a pyrrole group at 5' with pyrrole.

Figure 1